

CSCI-1680

Layering and Encapsulation


Nick DeMarinis

Administrivia

- HW0: Due TODAY by 11:59pm
- Container setup: due by Thursday
 - If you have issues, please fill out the form
→ START AFTER LEC 3
- Snowcast out later today (look for Ed post)
 - Gearup Thursday 1/29 5-7pm ~~CH 303~~ (+ recorded)
CH 165
- Milestone due by Monday 2/2 by 11:59pm ~~50%~~
 - Warmup and first steps + design doc for the rest

Topics for Today

- Layering and Encapsulation
- Intro to IP, TCP, UDP
- Demo on sockets

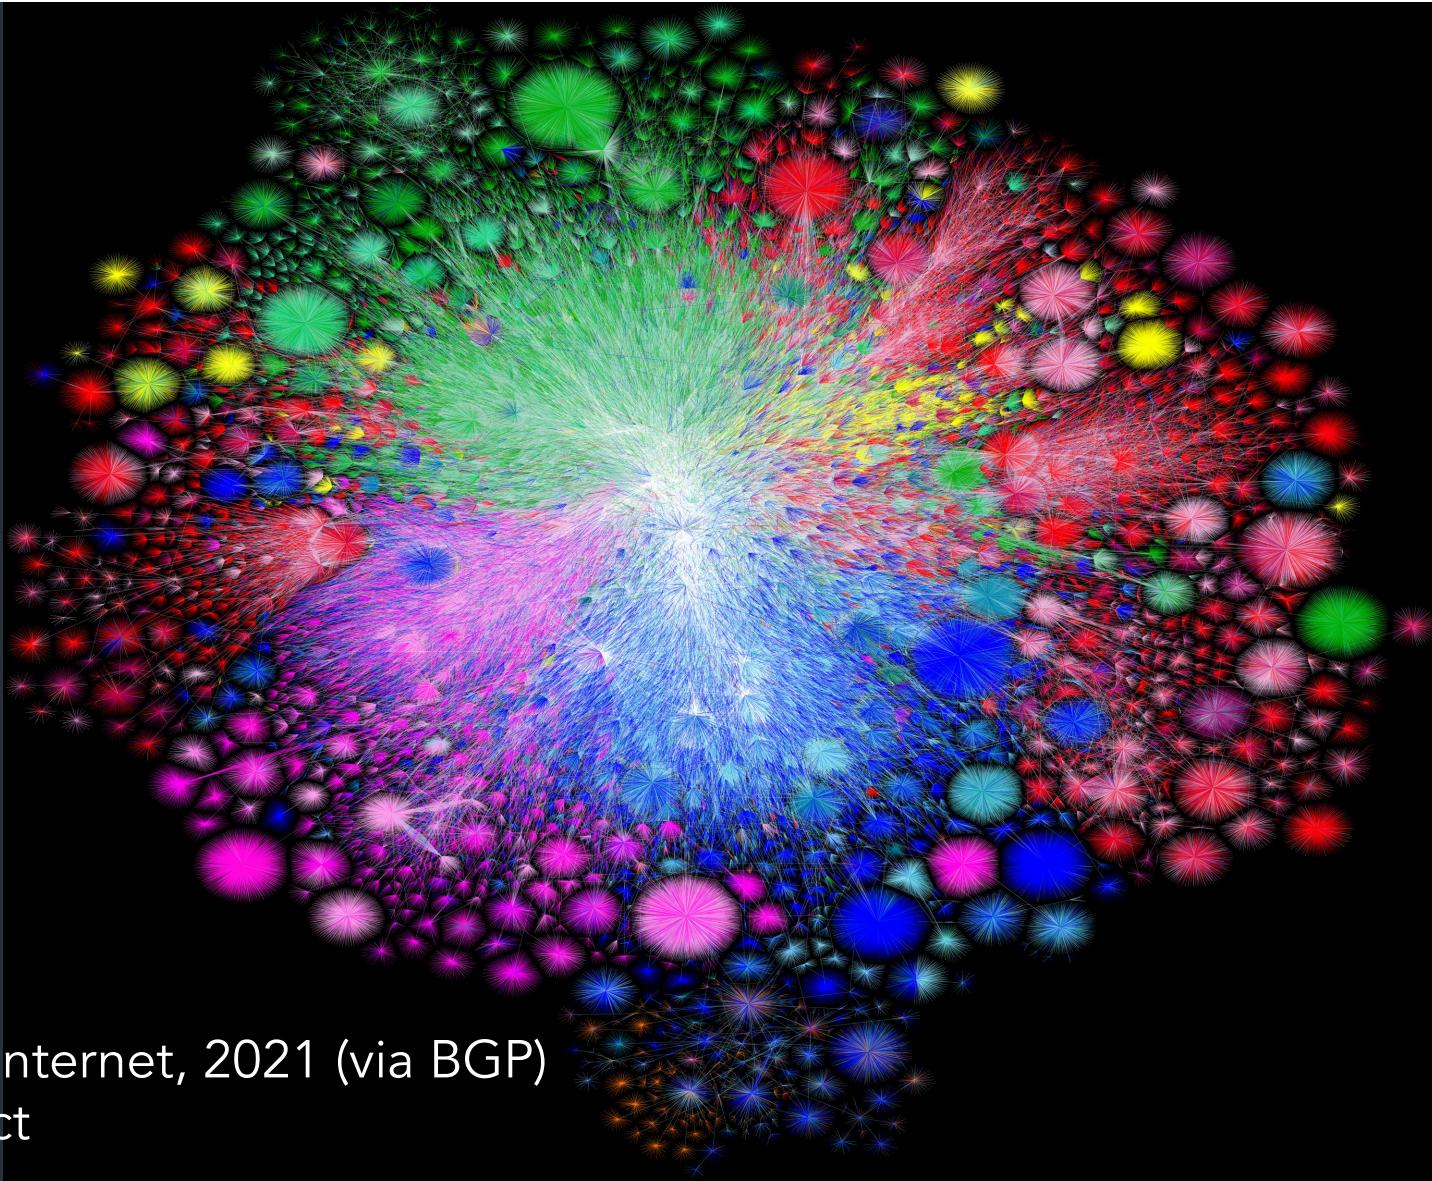

Color Chart
North America (ARIN)
Europe (RIPE)
Asia Pacific (APNIC)
Latin America (LANIC)
Africa (AFRINIC)
Backbone
US Military

Map of the Internet, 2021 (via BGP)
OPTE project

How do we make sense of all this?

Examples from discussion:

Making physical links
Getting stuff to arrive in order

Reliability
Identifying all the things

Concurrency
Managing paths
Multiplexing

Solve with abstractions: break problem into parts,
solve parts independently
=> Layers


Security

How do we make sense of all this?

- Very large number of computers
- Diverse of technologies and constraints
- Lots of *multiplexing*
- No single administrative entity

Evolving demands, protocols, apps => different requirements!

Layering

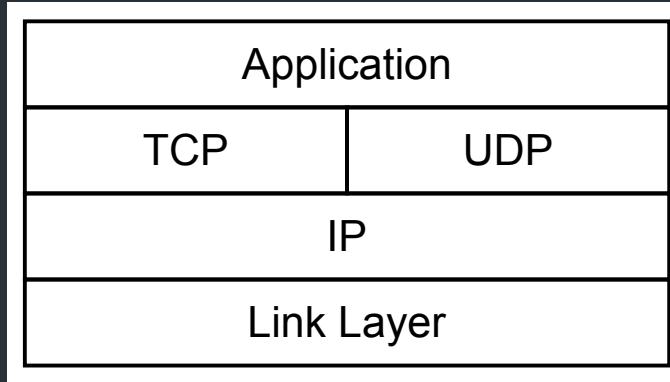

Abstraction to the rescue!

Idea: Break problem into separate parts, solve part independently

Encapsulate data from “higher layer” inside “lower layer”
=> Lower layer can handle data without caring what's above it!


Analogy: how to deliver a package?



Add metadata that tells us where data should go ("label on package")

Data: content, also called payload

Metadata: header

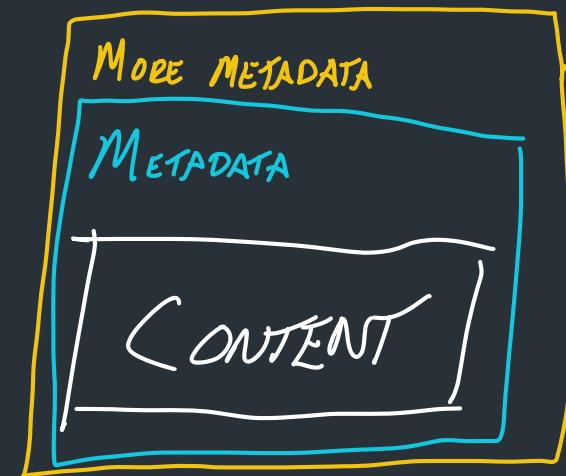


The big complex picture

Application Protocol (L7)

Transport Protocol (L4)

Network Protocol (L3)

Link-Layer Protocol (L2)

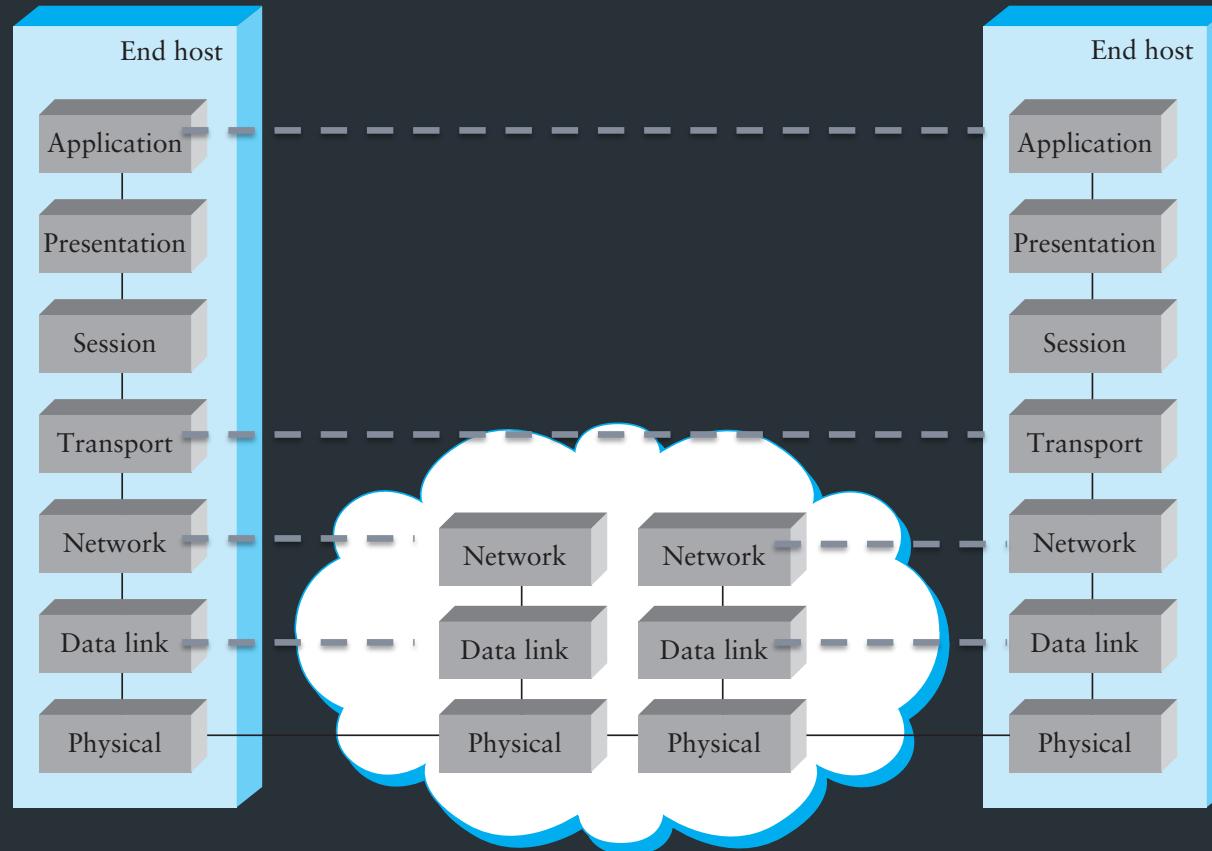


“OSI reference model” or “7-layer model”

Today's goals

- => Introduce the most fundamental abstractions and why we have them
- => Introduce key features you need to know now to write programs that use the network

Don't worry: We're going to break down each layer
in detail in the rest of the course!

Applications (Layer 7)

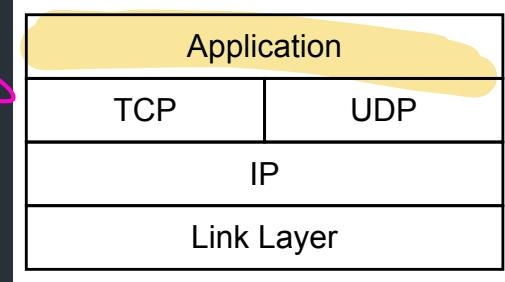

The applications/programs/etc you use every day

Examples

- HTTP/HTTPS: Web traffic (browser, etc)
- SSH: secure shell
- FTP: file transfer
- DNS (more on this later)
- ...

When you're building programs,
you usually work here




How to make apps use the network?

```
print("Hello world")
```



```
send("Hello world")
```

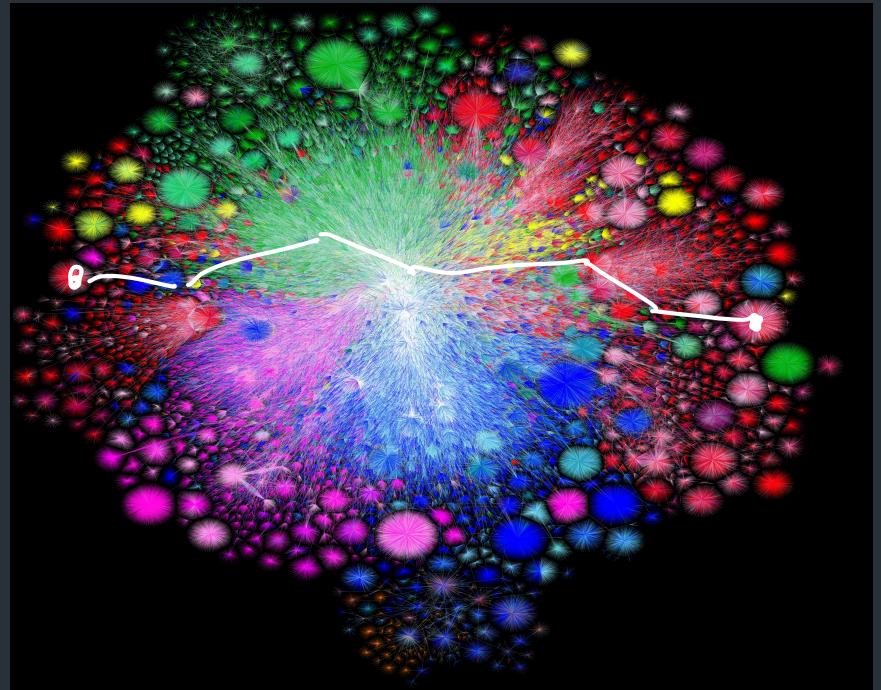

How to make apps use the network?

```
print("Hello world")
```



```
send("Hello world")
```


- ⇒ Want to send useful messages, not packets
- ⇒ Don't have to care about how path packet takes to get from A->B, we just want it to get there



Next layer: transport layer

Apps rely on: transport layer (layer 4)

OS provides interface for "sockets": API for making network connections

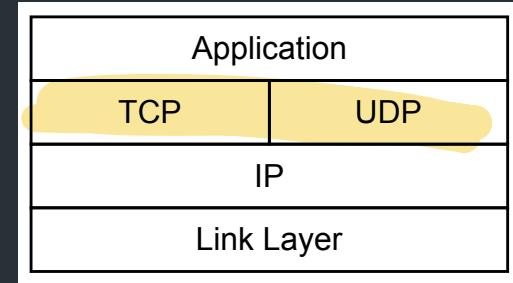


Creates a "pipe" to send/recv data to another endpoint, like a file descriptor


Two classic transport layer protocols:
TCP (reliable) and UDP (unreliable)

OS needs to keep track of which sockets belong to which app => multiplexing

Apps rely on: transport layer (layer 4)

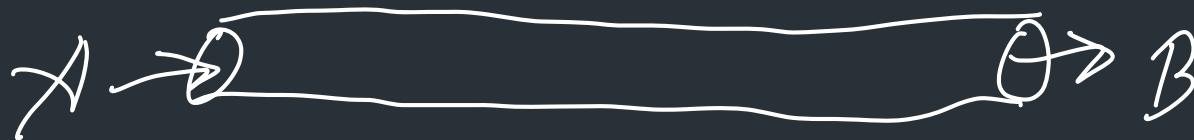

L7
L4

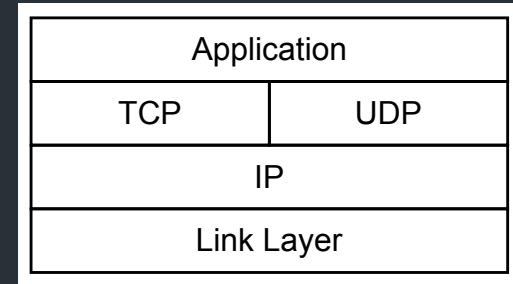


OS provides as "socket interface": API in the OS for making network connection

For an app, creates a "pipe" to send/recv data to for from another endpoint
=> Think like a file descriptor

OS keeps track of which sockets belong to which app => multiplexing

Apps rely on: transport layer (layer 4)

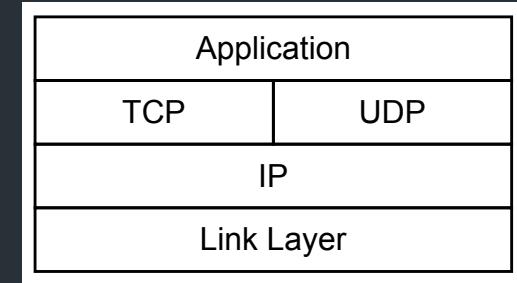


- Provided by OS as socket interface
- For app, creates a “pipe” to send/recv data to/from another endpoint (*think like a file descriptor*)
- OS keeps track of sockets which sockets belong to which app => multiplexing

Transport layer: multiplexing applications

Multiplexing provided by **port numbers**

- 16-bit number 0—65535
- Servers use well-known port numbers, clients typically choose one at random

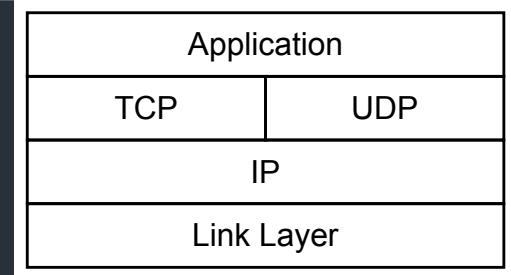

Two classic protocols we'll see:

- TCP (reliable)
- UDP (unreliable)

(lots more on this later)



Port	Service
22	Secure Shell (SSH)
25	SMTP (Email)
80	HTTP (Web traffic)
443	HTTPS (Secure Web traffic)
16800	Snowcast

What service does the transport layer need?



Layer 3: Network layer

Provided by: Internet Protocol (IP)

- Move packets between any two hosts anywhere on the Internet
- Responsible for routing and forwarding between nodes

Every host has a unique address:

www.cs.brown.edu => 128.148.32.110

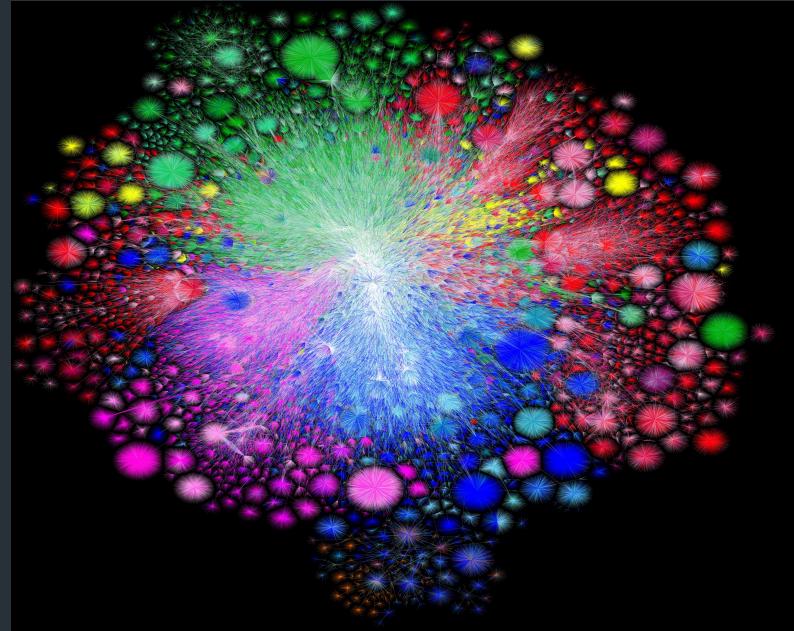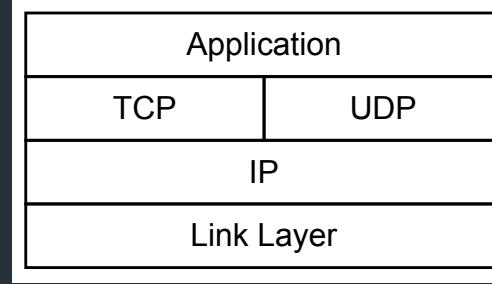

Given address, the network knows how to get the packet there



Wi-Fi

[Wi-Fi](#)[TCP/IP](#)[DNS](#)[WINS](#)[802.1X](#)[Proxies](#)[Hardware](#)

Configure IPv4:

IPv4 Address: 172.17.48.252

Subnet Mask: 255.255.255.0

DHCP Client ID:

(If required)

Router: 172.17.48.1

Configure IPv6:

Router:


IPv6 Address:

Prefix Length:



L4
TRANSPORT

L3
NETWORK

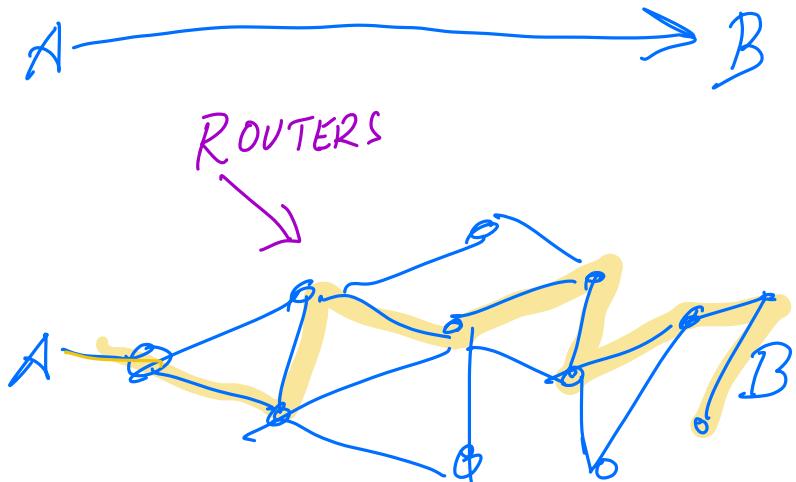

148.128.34.110

128.148. x. x

Anatomy of a packet

```
> Frame 100: 452 bytes on wire (3616 bits), 452 bytes captured (3616 bits) on interface en0, id 0
> Ethernet II, Src: Apple_15:8e:b8 (f0:18:98:15:8e:b8), Dst: Cisco_c5:2c:a3 (f8:c2:88:c5:2c:a3)
> Internet Protocol Version 4, Src: 172.17.48.252, Dst: 128.148.32.12
> Transmission Control Protocol, Src Port: 52725, Dst Port: 80, Seq: 1, Ack: 1, Len: 386
> Hypertext Transfer Protocol
```

Lower layers

Link layer (L2): Individual links between nodes
=> Ethernet, wifi, cellular, ...



Physical layer (L1): how to move bits over link
=> Engineering/physics problem



Examples


- Wifi
- Cellular Data
- Ethernet
- Fiber optic
- ...

The OS sees links as **interfaces**
=> Each one probably has a driver that implements that particular protocol

What you should take away from this




What you should take away from this

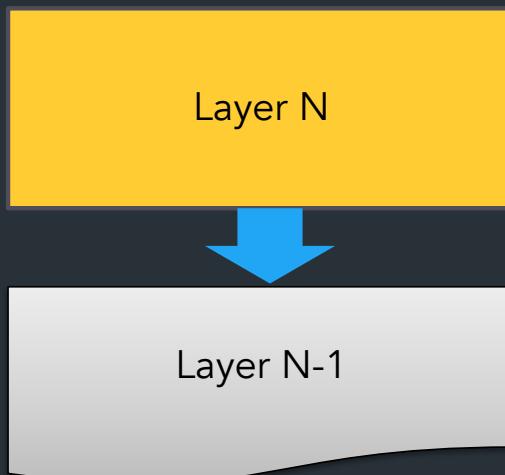

Each layer is defined by some protocol

Layer N uses the services provided by N-1 to operate

What you should take away from this

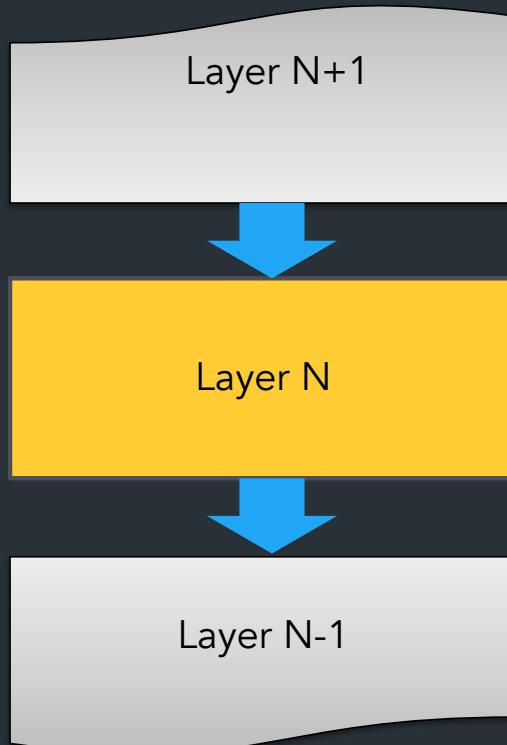


Each layer provides a service for the layers “above” it

Each layer is defined by some protocol

Layer N uses the services provided by N-1 to operate

IP as the “narrowing point”

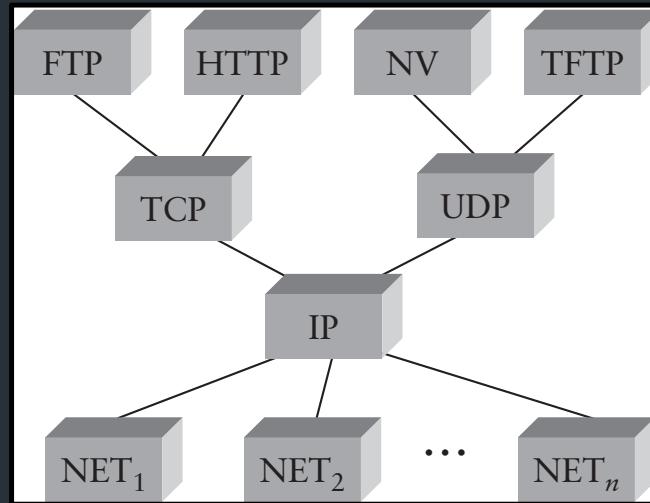

- Applications built using IP
- IP connects many heterogeneous networks

“Hourglass” structure => one (actually two) core abstractions!

Why do we do this?

- Helps us manage complexity
- Different implementations at one “layer” use same interface
- Allows independent evolution

To recap

3. Network

Service: move packets to any other node in the network
IPv4, IPv6 => (Unreliable)

To recap

3. Network

Service: move packets to any other node in the network
IPv4, IPv6 => (Unreliable)

2. Link

Service: move frames to other node via link
(eg. Ethernet, Wifi, ...)

1. Physical

Service: move bits across link
(Electrical engineering problem)

To recap

5. Transport

Service: multiplexing applications
TCP: Reliable byte stream
UDP: Unreliable messages

3. Network

Service: move packets to any other node in the network
IPv4, IPv6 => (Unreliable)

2. Link

Service: move frames to other node via link
(eg. Ethernet, Wifi, ...)

1. Physical

Service: move bits across link
(Electrical engineering problem)

To recap

7. Application

Service: user-facing application. (eg. HTTP, SSH, ...)
Application-defined messages

5. Transport

Service: multiplexing applications
TCP: Reliable byte stream
UDP: Unreliable messages

3. Network

Service: move packets to any other node in the network
IPv4, IPv6 => (Unreliable)

2. Link

Service: move frames to other node across link.
(eg. Ethernet, Wifi, ...)

1. Physical

Service: move bits to other node across link
(Electrical engineering problem)

Where do we handle, eg, security, reliability, fairness?

How/where to handle challenges?

Can decide on how to distribute certain problems

- What services at which layer?
- What to leave out?
- More on this later ("End-to-end principle")

Example: Why bother having (unreliable) UDP, when TCP provides a reliable way to send data?

Get to decide where (and if) to pay the "cost" of certain features

Anatomy of a packet

```
> Frame 100: 452 bytes on wire (3616 bits), 452 bytes captured (3616 bits) on interface en0, id 0
> Ethernet II, Src: Apple_15:8e:b8 (f0:18:98:15:8e:b8), Dst: Cisco_c5:2c:a3 (f8:c2:88:c5:2c:a3)
> Internet Protocol Version 4, Src: 172.17.48.252, Dst: 128.148.32.12
> Transmission Control Protocol, Src Port: 52725, Dst Port: 80, Seq: 1, Ack: 1, Len: 386
> Hypertext Transfer Protocol
```

A
↑

B
127.0.0.1
PORT 9000
UDP

What are the things that we need to know about B to connect to it?

WANT TO
LISTEN

▶	6355	91.294778	128.148.205.238	66.228.43.75	HTTP	520	GET /assets/staff/ckim167.jpg	HTTP/1.1	
6376	91.294973	66.228.43.75	128.148.205.238	HTTP	2600	HTTP/1.1 200 OK	(JPEG JFIF image)		
6383	91.295255	66.228.43.75	128.148.205.238	HTTP	2481	HTTP/1.1 200 OK	(JPEG JFIF image)		
6441	91.395012	128.148.205.48	66.228.43.75	HTTP	413	GET /favicon.ico	HTTP/1.1		
6442	91.395155	66.228.43.75	128.148.205.48	HTTP	1600	HTTP/1.1 204 No Content			

▶ Frame 6355: 520 bytes on wire (4160 bits), 520 bytes captured (4160 bits) on interface sshdump, id 0
 ▶ Ethernet II, Src: Cisco_9f:f0:03 (00:00:0c:9f:f0:03), Dst: f2:3c:91:6e:e3:e1 (f2:3c:91:6e:e3:e1)
 ▶ Internet Protocol Version 4, Src: 128.148.205.238, Dst: 66.228.43.75
 ▶ Transmission Control Protocol, Src Port: 63872, Dst Port: 80, Seq: 4405, Ack: 303891, Len: 454

▼ Hypertext Transfer Protocol

▶ GET /assets/staff/ckim167.jpg HTTP/1.1\r\n
 Host: test.cs1680.systems\r\n
 Connection: keep-alive\r\n
 User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko...
 Accept: image/avif,image/webp,image/apng,image/svg+xml,image/*,*/*;q=0.8\r\n
 Referer: http://test.cs1680.systems/staff/\r\n
 Accept-Encoding: gzip, deflate\r\n
 Accept-Language: lt,en-US;q=0.9,en;q=0.8,ru;q=0.7,pl;q=0.6\r\n
 dnt: 1\r\n
 sec-gpc: 1\r\n
 \r\n

[\[Full request URI: http://test.cs1680.systems/assets/staff/ckim167.jpg\]](#)

[\[HTTP request 10/11\]](#)

[\[Prev request in frame: 6271\]](#)

[\[Response in frame: 6383\]](#)


[\[Next request in frame: 6549\]](#)

0000	f2	3c	91	6e	e3	e1	00	00	0c	9f	f0	03	08	00	45	60
0010	01	fa	00	00	40	00	37	06	84	ec	80	94	cd	ee	42	e4
0020	2b	4b	f9	80	00	50	e3	13	86	d0	42	f7	1c	ba	80	18
0030	0d	ad	50	d4	00	00	01	01	08	0a	3a	0d	c1	0b	ea	d6
0040	b7	94	47	45	54	20	2f	61	73	73	65	74	73	2f	73	74
0050	61	66	66	2f	63	6b	69	6d	31	36	37	2e	6a	70	67	20
0060	48	54	54	50	2f	31	2e	31	0d	0a	48	6f	73	74	3a	20
0070	74	65	73	74	2e	63	73	31	36	38	30	2e	73	79	73	74
0080	65	6d	73	0d	0a	43	6f	6e	6e	65	63	74	69	6f	6e	3a
0090	20	6b	65	65	70	2d	61	6c	69	76	65	0d	0a	55	73	65
00a0	72	2d	41	67	65	6e	74	3a	20	4d	6f	7a	69	6c	61	
00b0	2f	35	2e	30	20	28	4d	61	63	69	6e	74	6f	73	68	3b
00c0	20	49	6e	74	65	6c	20	4d	61	63	20	4f	53	20	58	20
00d0	31	30	5f	31	35	5f	37	29	20	41	70	70	6c	65	57	65
00e0	62	4b	69	74	2f	35	33	37	2e	33	36	20	28	4b	48	54
00f0	4d	4c	2c	20	6c	69	6b	65	20	47	65	63	6b	6f	29	20
0100	43	68	72	6f	6d	65	2f	31	32	38	2e	30	2e	30	2e	30
0110	20	53	61	66	61	72	69	2f	35	33	37	2e	33	30	0d	0a
0120	41	63	63	65	70	74	3a	20	69	6d	61	67	65	2f	61	76
0130	69	66	2c	69	6d	61	67	65	2f	77	65	62	70	2c	69	6d
0140	61	67	65	2f	61	70	6e	67	2c	69	6d	61	67	65	2f	73
0150	76	67	2b	78	6d	6c	2c	69	6d	61	67	65	2f	2a	2c	2a
0160	2f	2a	3b	71	3d	30	2e	38	0d	0a	52	65	66	65	72	65
0170	72	3a	20	68	74	74	70	3a	2f	2f	74	65	73	74	2e	63
0180	73	31	36	38	30	2e	73	79	73	74	65	6d	73	2f	73	74
0190	61	66	66	2f	0d	0a	41	63	63	65	70	74	2d	45	6e	63
01a0	6f	64	69	6e	67	3a	20	67	7a	69	70	2c	20	64	65	66
01b0	6c	61	74	65	0d	0a	41	63	63	65	70	74	2d	4c	61	6e
01c0	67	75	61	67	65	3a	20	6c	74	2c	65	6e	2d	55	53	3b
01d0	71	3d	30	2e	39	2c	65	6e	3b	71	3d	30	2e	38	2c	72
01e0	75	3b	71	3d	30	2e	37	2c	70	6c	3b	71	3d	30	2e	36
01f0	0d	0a	64	6e	74	3a	20	31	0d	0a	73	65	63	2d	67	70
0200	63	3a	20	31	0d	0a	0d	0a								

Example: communicating via UDP

UDP EXAMPLE

We'll break this down further next lecture!

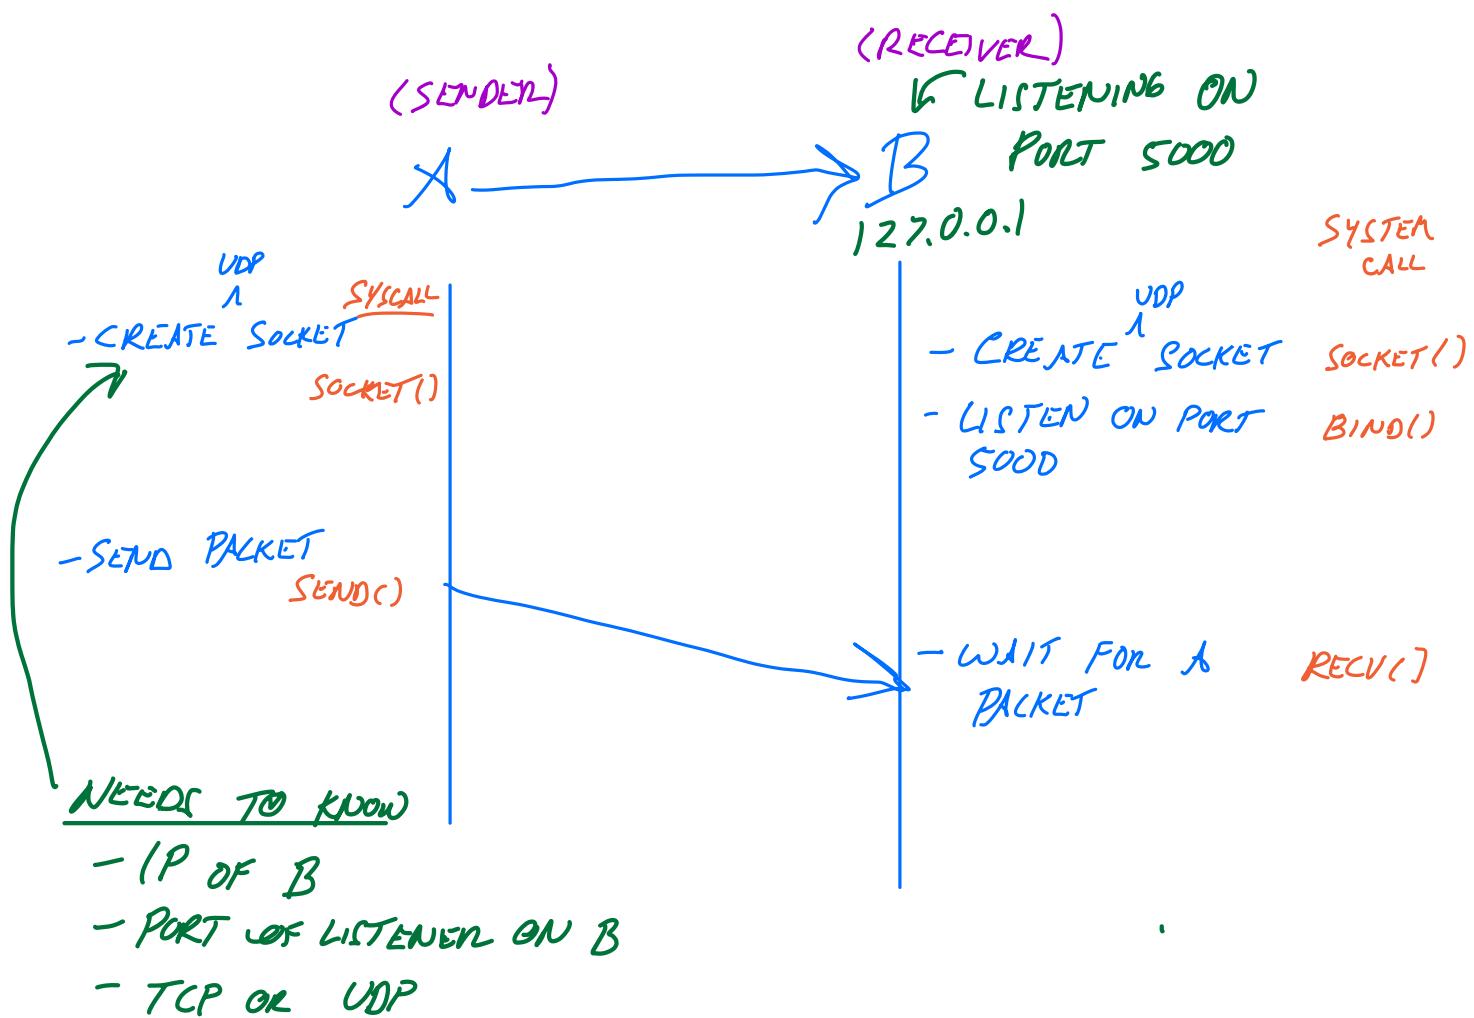

UDP: Unreliable transport protocol

=> Just send the packets, doesn't care if they actually arrive

=> Sender won't know if the packet reached the destination